

Pazon
IGNITIONS WITH THE 7½ YEAR WARRANTY

Sure-Fire™

TRIUMPH **BSA** **Norton**

MAGNETO REPLACEMENT

ELECTRONIC IGNITION SYSTEM

For 4 Stroke

Pre-Unit Twin Cylinder Motorcycles

With 12 VOLT Electrics, POS/ NEG Ground



SYSTEM TYPE: PAMT1

Sure-Fire System Contents:

- MAGNETO REPLACEMENT HOUSING WITH PRE-INSTALLED MAGNETIC ROTOR & TRIGGER
- TWO x 6 Volt Lucas Ignition coils + TWO coil clamps
- TWO plug (h.t.) leads with pre-fitted brass crimp and rubber cover
- TWO spark plug caps
- RED GROUNDING WIRE, BLACK COIL LINK WIRE
- CRIMP CONNECTORS & INSULATORS
- LARGE & SMALL CABLE TIES
- CABLE TIE ADHESIVE MOUNTING BASE (FOR IGNITION MODULE)

WARNING: RISK OF ELECTRIC SHOCK
ALWAYS TURN OFF BEFORE WORKING ON THE SYSTEM

BEFORE FITTING, PLEASE READ THESE INSTRUCTIONS CAREFULLY, INCLUDING THE NOTICE ON PAGE 12.

Sure-Fire Installation Instructions:

1. For safety, disconnect the battery, if fitted (preferably both terminals).
2. Remove the magneto.
3. The ignition module includes electronic advance/retard. Therefore, if fitted, the automatic advance unit is no longer required and should be removed. However, if it is to remain in place it must be locked solid by whatever method is available (e.g. by drilling a hole and inserting a steel locking pin to prevent the bob weights from moving, or by welding them in place). The preferred alternative is to replace the automatic advance unit with a solid drive pinion, please contact your dealer for the necessary parts, if required.
4. Fit the magneto replacement unit in place of the removed magneto using the original fixings.
5. Take the two supplied ignition coils and attach the spade terminals to the plus/minus terminal posts on the top of the coils, using the supplied nuts & washers (the rubber ht covers supplied with the coils are not required). Fit the two ignition coils in a suitable location, using the two coil clamps supplied. Push the supplied plug (h.t.) leads into the ht outlet at the top of each coil, and slide the rubber boot over the ht outlet. Route the plug leads to the spark plugs, cut to length (if required) and screw on the supplied plug caps.
6. Find a suitable place for the ignition module, e.g. under seat or tank. Secure the ignition module to the frame using one or more large cable

ties (or other suitable mounting method). An adhesive mounting base is provided; this can be affixed to the underside of the module and the cable tie passed through and around the module and frame. Do not completely wrap the module in foam rubber.

7. Remove the spark plugs.
8. Rotate the engine to the correct full advance timing position for your engine (on compression stroke), using a degree disc or dial gauge down the spark plug hole (typically between 28° to 38°, depending upon the engine). See table 1 on page 8 for typical figures for Triumph, Bsa & Norton twins.
9. Undo the two screws and remove the cap from the magneto replacement body.
10. Undo and remove the two pillar fixings & washers and lift out the trigger to expose the magnetic rotor.
11. Slacken the centre bolt (metric M6) using a 5mm hex key and position the rotor until one of the red indicator marks can be seen through the appropriate static timing hole in the trigger plate (clockwise for most machines, as viewed from the magnetic rotor side), with the plate positioned midway on its adjustment slots. **See figs. 3/4 on page 9.** [The magnetic rotor centre thread (metric M8) is provided for attaching a puller, if the rotor should need to be removed for servicing, etc.]
12. Tighten the magnetic rotor bolt using a 5mm hex key.
13. Taking the ignition trigger assembly, insert a small cable tie into the two holes in front of the connector block on the ignition trigger (the tie-strap may have been pre-fitted by your dealer). This will be used later to secure the two wires to the plate.
14. Refit the ignition trigger plate and pillar fixings & washers, positioned approximately in the centre of the slots (to allow for adjustment in either direction). Recheck that the red mark is visible through the appropriate static timing hole (move the plate slightly, if necessary). Handle the trigger with care. Tighten the pillar fixings; do not overtighten or the plate may become distorted.

WIRING:

15. All connections must be of the highest quality, use crimped or soldered connections; twisted wires will not give a satisfactory operation. Avoid coiling up surplus lead.
16. Using the black coil link wire, connect the negative (—) terminal of one ignition coil to the positive (+) terminal of the other ignition coil. See figs. 1/2 on page 7.
17. Take the black wire from the ignition module, cut to length and fit an insulator and female spade connector to the end. Connect to the negative (—) terminal on ignition coil #1. See figs. 1/2 on page 7.
18. Take the red wire from the ignition module, cut to length and fit an insulator and female spade connector to the end. Connect to the positive


- (+) terminal on ignition coil #2. See figs. 1/2 on page 7.
19. For NEGATIVE GROUND electrics, go to step 22.
 20. For POSITIVE GROUND electrics (**standard**):
Take the WHITE wire from the module, cut to length and fit an insulator and male spade connector to the end. Connect to the power feed from the ignition switch.
 21. Take the red grounding wire, fit an insulator and female spade connector on one end and connect to the positive (+) terminal on ignition coil #2. Cut to length and fit a ring terminal on the other end and connect to a good grounding point on the frame, ideally the battery positive (+) terminal. See fig.1 GOTO STEP 24.
 22. For NEGATIVE GROUND electrics:
Connect the positive (+) side of the ignition coil to the feed from the ignition switch. This terminal also has the red wire from the ignition module connected to it. See fig.2
 23. Take the WHITE wire from the module, cut to length and fit a ring terminal connector to the end. Connect to a good grounding point on the frame, ideally the battery negative (—) terminal. See fig.2
 24. Allowing a minimum of 50mm/2" of excess wire between the trigger and ignition module, route the white-black & yellow-black wires from the ignition module down to the magneto replacement housing, feed through the grommet in the cap and around to the connector block on the ignition trigger and cut to length. Using tie-straps or tape, secure these wires to the frame, preferably away from other wiring/h.t. leads. Slide a small length of sleeving of the two wires. With a pair of wire strippers/cutters, carefully remove 4-5mm of insulation from the ends of the two wires. Insert the yellow-black wire into the left-hand screw terminal and the white-black wire into the right-hand screw terminal. The connector block terminals are marked on the trigger plate "Y/B" and "W/B". Tighten the two screws. Secure the wires and sleeving with the cable tie, fitted in step 13. If preferred, the two wires can be soldered directly to the trigger using the two solder pads provided in front of the connector block. It is essential that these two wires are connected the right way around for correct operation of the ignition system. Reversed connections will give very retarded ignition timing.
 25. Remove any redundant wires or insulate bare ends. Re-check all connections are good and tight; any loose crimps should be removed, slightly closed up and refitted, or preferably replaced.
 26. Refit spark plugs, tank, fuel lines, battery & seat, as required.
 27. Final ignition timing. Start engine and run for 4-5 minutes to warm up. If strobe timing marks are available, use a white light strobe and time the engine to the full advance mark (previously used in step 8) with the engine running up to 4000rpm. If running in, you may strobe time at 3000rpm to the full advance figure less approx. 2°. Stop the engine and

adjust the timing by making very small movements of the ignition trigger on its slotted holes; moving the trigger by 1° is equivalent to 2° of the crankshaft. When using a strobe light, you may see a small amount of advance above 4000rpm, this is normal. To advance the timing, rotate the trigger against the direction of the magnetic rotor (normally anti-clockwise). To retard the timing, rotate the trigger in the same direction as the magnetic rotor (normally clockwise). In the unlikely event that the timing cannot be obtained before the end of the adjustment slots, the magnetic rotor will need to be slackened off and repositioned slightly. If strobe timing marks are not available, road test the machine and make any final timing adjustments (if necessary) for optimum performance. See advance graph on page 8 (degree figures are based on the full advance settings in table 1.

28. Refit magneto replacement cap. The timing is now set and requires no further adjustment. However, please note that for satisfactory operation of this ignition system it is important that the wiring, ignition coils, switch, battery, h.t. leads, plugs and plug caps are in good order.

POSITIVE GROUND (standard)

IGNITION SWITCH FUSE Fig. 1

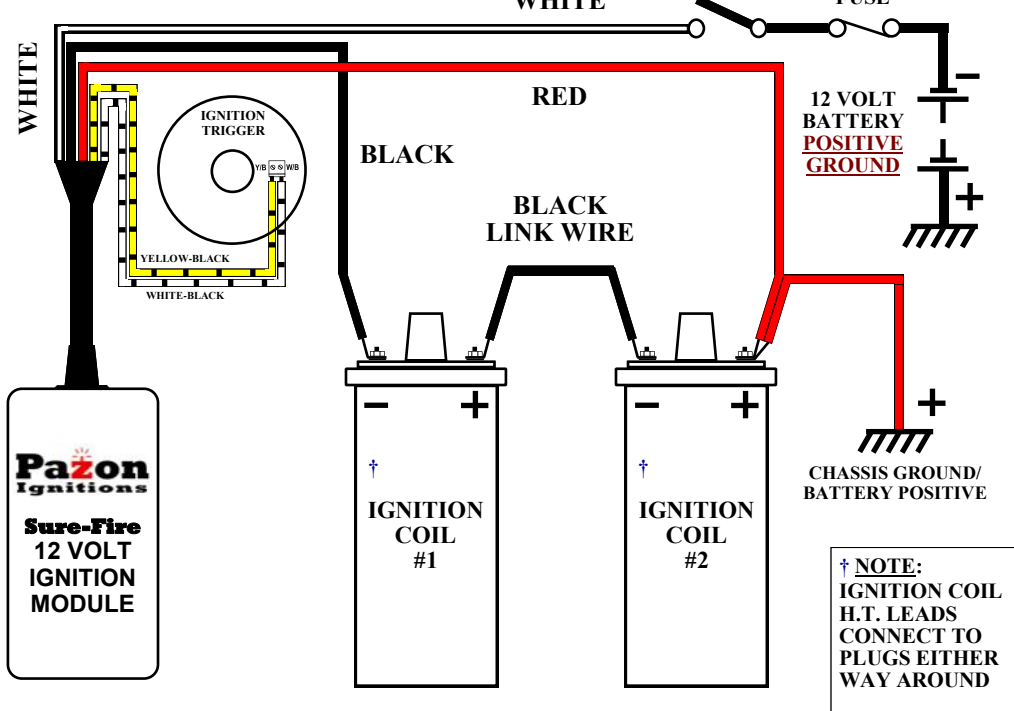

NEGATIVE GROUND

WHITE Fig. 2

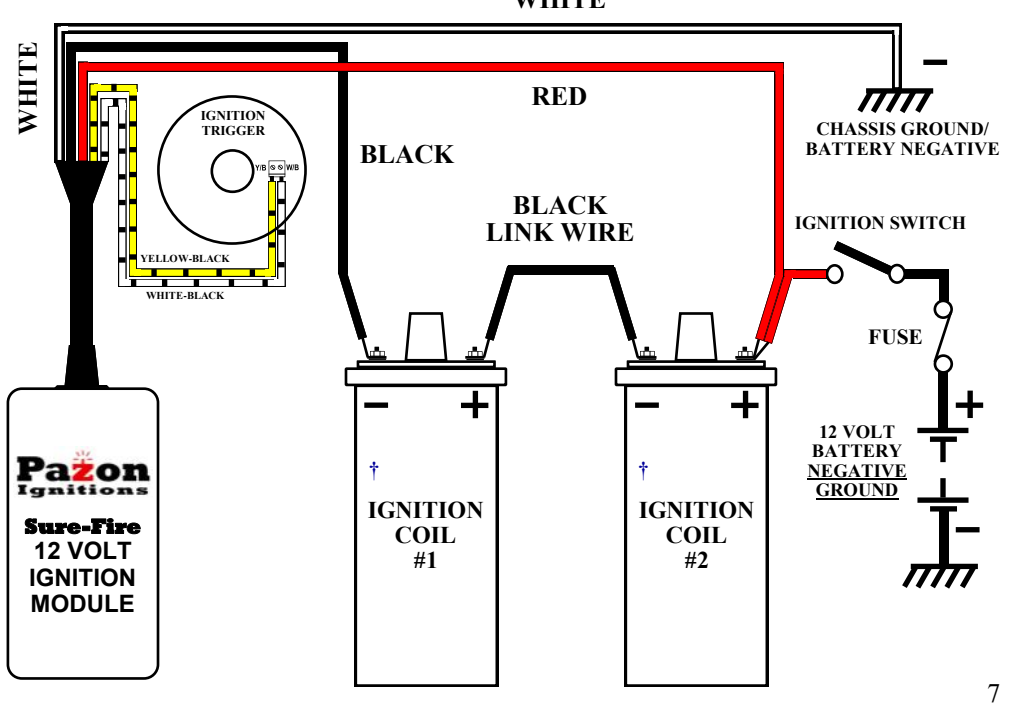
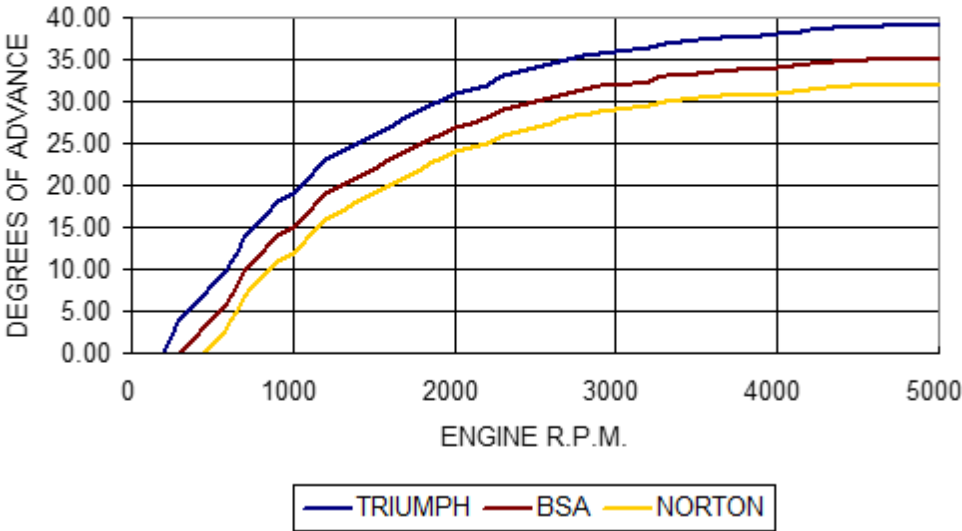


Table 1 Typical full advance figures

MOTORCYCLE	FULL ADVANCE TIMING
TRIUMPH	38°
BSA	34°
NORTON	31°

NOTE: IF USING A DEGREE DISC ATTACHED TO THE CAMSHAFT / ½ ENGINE SPEED SHAFT, THE FULL ADVANCE FIGURE READING ON THE DISC MUST BE HALVED.
 E.G. FOR 38°, SET ENGINE TO T.D.C., ZERO DEGREE DISC AND ROTATE ENGINE BACKWARDS UNTIL DEGREE DISC HAS TRAVELLED 19°.

Pazon Sure-Fire Ignition Timing
IGNITIONS WITH THE 7% YEAR WARRANTY
BRITISH TWINS



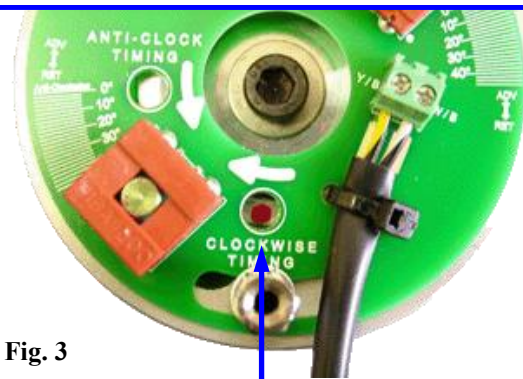


Fig. 3

CLOCKWISE ROTATION
(MOST MAGNETO MACHINES)
RED INDICATOR MARK
ON MAGNETIC ROTOR ALIGNED
UNDER CLOCKWISE TIMING HOLE,
ENGINE SET AT FULL ADVANCE

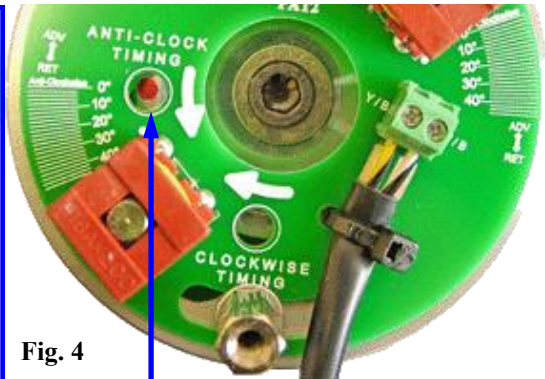


Fig. 4

ANTI-CLOCKWISE ROTATION
RED INDICATOR MARK
ON MAGNETIC ROTOR ALIGNED
UNDER ANTI-CLOCKWISE
TIMING HOLE,
ENGINE SET AT FULL ADVANCE

Sure-Fire TECHNICAL DATA

Ignition Module (Part# PAM2)

Minimum Supply Voltage:

Maximum Supply Voltage:

Maximum Ignition Coil Peak Primary Voltage:

Maximum Ignition Coil Secondary Voltage:

Current Draw (Static):

Current Draw (Dynamic):

Maximum Ignition Coil Current Draw:

Ignition Coil Turn Off (Engine Static):

Minimum Cranking Speed:

Maximum Switching Rate:

10 Volts DC

16 Volts DC

(Reverse Polarity Protected)

400 Volts (Regulated)

Ignition Coil Dependent

0.05 Amps Max. (Ignition Coils Off)

Typically 2 Amps (Coil Dependent)

5 Amps

3 Seconds (Typical)

100rpm (Typical)

10,000 Sparks/Minute (Typical)

Ignition Trigger (Part# PAT2)

Trigger Type:

Configuration:

Trigger coil resistance:

Total trigger resistance:

2-Way Connector Block Wire Size:

Twin ferrite core

Series connected

55Ω @ 20°C.

110Ω @ 20°C.

0.75mm² max.

Ignition Magnetic Rotor (Part# PAR2)

Material:

Magnet Polarity:

Aluminium + inner steel ring

South poles both face outwards

Ignition Coils

For best results with this system, use two 6 volt Lucas coils (or equivalent), e.g. PAZON part# IC26, or one 12 volt dual output ignition coil with a primary resistance of 3 to 5 ohms, e.g. PAZON part# IC35. CDI type and some electronic ignition coils are incompatible with this system; for suitability check the primary resistance is 3 ohms or more (measure across the + and — terminals with a multimeter). When using two ignition coils they must be connected in series (link between the coils from + to —), do not connect the coils in parallel.

For a twin-plug head use two dual output coils connected in series with a total primary resistance of between 3 to 5ohms.

HT Leads, Spark Plugs & Plug Caps

Always use copper cored ht leads (as fitted to the supplied coil). Do not use carbon-fibre (resistive) leads.

Provided you have the correct grade of plugs for your engine and that they are in good order, there is no need to change them when fitting this system. The spark plug gaps can be left as standard, as a guide 0.025"-0.028" should be sufficient.

We recommend fitting NGK 5K resistor (suppressor) type plug caps (or similar good quality make) as supplied, but you can also fit non-resistor caps.

General Data/Troubleshooting

This system can be adapted to work on many types of engine, provided that the required firing interval is every 360° crankshaft / 180° camshaft. This ignition is of the wasted spark type, i.e. sparking occurs every turn of the engine (on compression & exhaust strokes).

Wiring should be cut to the correct length. Excess wire should not be coiled up; this can affect the correct running of the ignition system. Where possible the wires from the ignition trigger should be run separately from the rest of the wiring loom, especially the alternator stator wiring.

The frame/chassis must act as an electrical return (ground/earth), whether positive or negative ground. If the engine is rubber mounted a good ground/earth strap must be provided.

This system can be run total-loss from a battery only (e.g. for off-road applications).

The **Sure-Fire** ignition module features a simple self-test facility for producing sparks without turning the engine. Disconnect the ignition trigger wires (w-b & y-b) from the trigger in the magneto replacement housing.

Switch the ignition on. Take the trigger wires and touch the bare ends of the wires together and open them approximately once per second, both plugs should spark at the same time. If there are no sparks, check coil, leads, caps, plugs, battery, switch, grounding, wiring, connections & ignition module. Continuous sparks without turning the engine indicates a poor supply to the ignition; check battery (bad cell), switch, grounding and electrical connections.

Terms & Conditions and Warranty

- Use of this product indicates your acceptance of this notice.
- The product design & literature is Copyright © PAZON IGNITIONS LTD. 2005-2024, and is protected under international copyright, trademark & treaty provisions.
- To provide the best ignition systems possible, PAZON IGNITIONS reserves the right to alter and improve the specifications of its products without prior notice.

Ignition Systems

- Pazon warrants to the original purchaser that the Pazon Ignition System be free from defects in workmanship & parts under normal use for a period of 7½ years from date of purchase.

Ignition Spares

- Spares are defined as item(s) not purchased as part of a complete ignition system. Pazon Ignitions warrants to the original purchaser that these item(s) be free from defects in workmanship & parts under normal use for a period of one year from date of purchase.
- Ignition coils will only be covered by the warranty if it can be proved that the fault is due to a manufacturing fault within the coil.

Limitation of Liability

- In no event shall Pazon Ignitions liability related to the product exceed the purchase price actually paid for the product.
- Neither Pazon Ignitions nor its suppliers shall in any event be liable for any damages whatsoever arising out of or related to the use or inability to use the product, including but not limited to the direct, indirect, special, incidental or consequential damages, or other pecuniary loss.
- This warranty will be void if the product or parts have been altered, damaged, abused or installed incorrectly.
- This warranty will be void if parts supplied by Pazon Ignitions are used with other makes of ignition. Your statutory rights are not affected.

Warranty Claims

- To make a claim under warranty, the product must be returned to PAZON IGNITIONS or its authorized representative, with a copy of your receipt (or evidence of date & place of purchase), within the warranty period.
- Include a detailed description of the problem and why you believe there is a fault within the ignition system.
- The system must be returned postage paid. Proof of posting is not proof of receipt, therefore we recommend using a recorded mail service.
- Upon receipt we will thoroughly test the returned items and repair or replace any items found to be faulty and covered by the warranty.
- Please allow seven working days from receipt of the returned parts before contacting us, to allow sufficient time for a thorough test and evaluation.
- PLEASE CONTACT PAZON IGNITIONS FOR RETURN INSTRUCTIONS.

✉ **Pazon Ignitions Ltd, 274 Hot Springs Road, RD 2,
Katikati 3178, Bay of Plenty, New Zealand**

☎ **TELEPHONE: +64 (0) 7549 5878** ☎ **FAX: +64 (0) 7549 5879**
EMAIL: ignition@pazon.com WEB: www.pazon.com